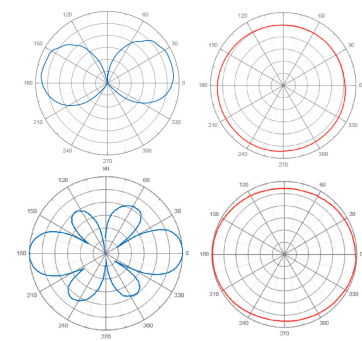
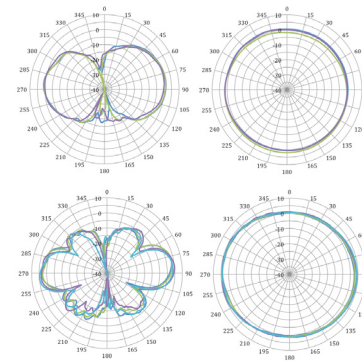

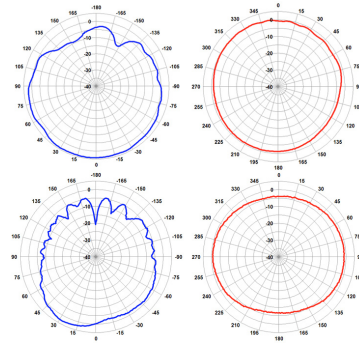
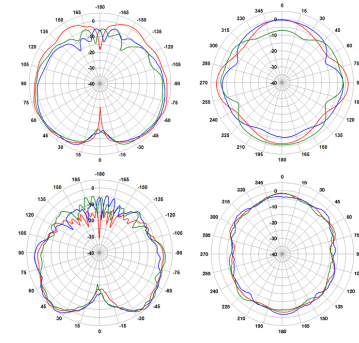
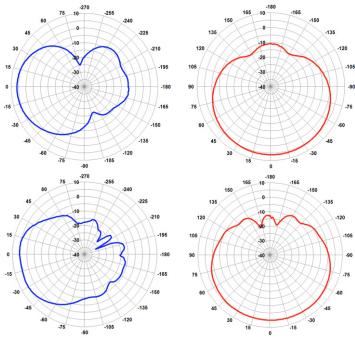

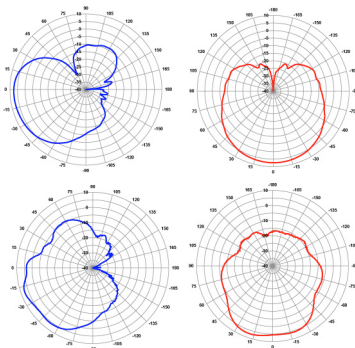
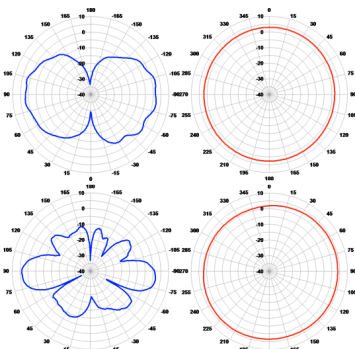


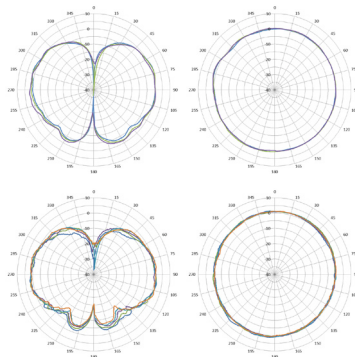
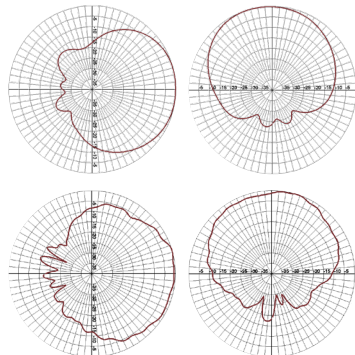
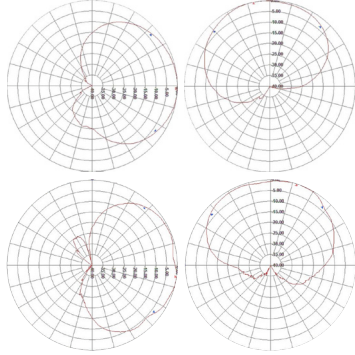
INDOOR ONLY (RP-SMA)												
MODEL	TYPE	BAND(S)	TYPICAL GAIN	POLARIZATION & ELEMENT TYPE	BANDWIDTH (DEGREES)		VSWR	MAX INPUT POWER	CONNECTOR(S)	DIMENSIONS (MM)	OPERATING TEMPERATURE	ANTENNA PATTERNS
					H-PLANE	E-PLANE						
AP-ANT-1B 	Omnidirectional	2.400 GHz - 2.500 GHz	3.8 dBi	Vertical, linear	360	50	< 2.0 : 1	2 watts	1x RP-SMA/m, direct-mount	127 x 39 x 19	-10° C to +55° C	
		4.900 GHz - 5.875 GHz	5.8 dBi		360	25						
AP-ANT-1F 	Omnidirectional	2.400 GHz - 2.500 GHz	2.0 dBi	Vertical, linear	360	50	< 2.0 : 1	2 watts	1x RP-SMA/m, direct-mount	127 x 39 x 19	-10° C to +55° C	
		4.900 GHz - 5.875 GHz	5.0 dBi		360	25						

INDOOR ONLY (RP-SMA)												
MODEL	TYPE	BAND(S)	TYPICAL GAIN	POLARIZATION & ELEMENT TYPE	BANDWIDTH (DEGREES)		VSWR	MAX INPUT POWER	CONNECTOR(S)	DIMENSIONS (MM)	OPERATING TEMPERATURE	ANTENNA PATTERNS
					H-PLANE	E-PLANE						
AP-ANT-13B 	Downtilt omni	2.400 GHz - 2.500 GHz	4.4 dBi	Vertical, linear downtilt	360	60	< 2.0 : 1	2 watts	1x RP-SMA/m, pigtail cable	55 x 55 x 16	-40° C to +70° C	
		4.900 GHz - 5.900 GHz	3.3 dBi									
AP-ANT-16 	Downtilt 3x3 MIMO omni	2.400 GHz - 2.500 GHz	3.9 dBi	Vertical, linear downtilt	360	60	< 2.0 : 1	2 watts	3x RP-SMA/m, pigtail cable	308 x 92 x 22	-40° C to +70° C	
		4.900 GHz - 5.900 GHz	4.7 dBi									

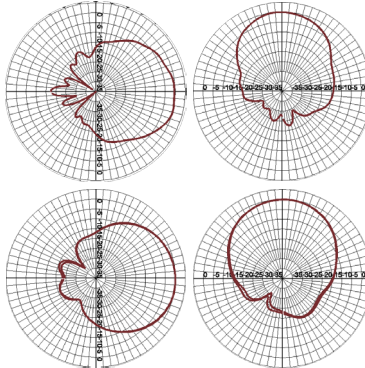
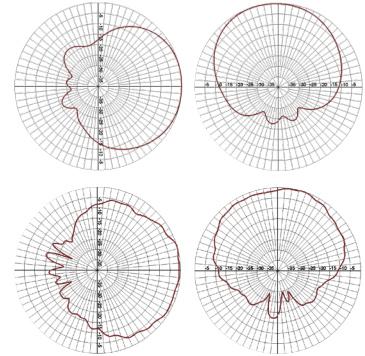
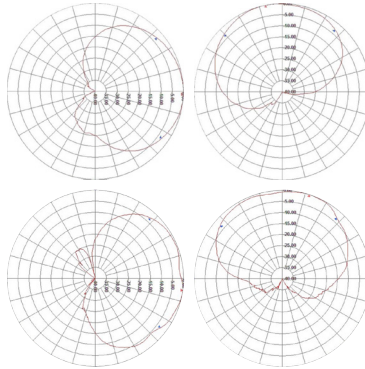
INDOOR/OUTDOOR (RP-SMA)

MODEL	TYPE	BAND(S)	TYPICAL GAIN	POLARIZATION & ELEMENT TYPE	BANDWIDTH (DEGREES)		VSWR	MAX INPUT POWER	CONNECTOR(S)	DIMENSIONS (MM)	OPERATING TEMPERATURE	ANTENNA PATTERNS
					H-PLANE	E-PLANE						
AP-ANT-17 	120 Degree 3x3 MIMO sector	2.400 GHz - 2.500 GHz	6.0 dBi	Vertical linear dual-slant +/-45 degrees	120	65	< 1.7 : 1	50 watts	3x RP-SMA/m, pigtail cable	200 x 200 x 33	-40° C to +70° C	
		4.900 GHz - 5.875 GHz	5.0 dBi		150	75						
AP-ANT-18 	60 Degree 3x3 MIMO sector	2.400 GHz - 2.500 GHz	7.5 dBi	Vertical linear dual-slant +/-45 degrees	60	60	< 1.8 : 1	20 watts	3x RP-SMA/m, pigtail cable	200 x 200 x 33	-40° C to +70° C	
		4.900 GHz - 5.875 GHz	7.5 dBi									
AP-ANT-19 	Dual band omni	2.400 GHz - 2.500 GHz	3.0 dBi	Vertical omni	360	50	< 2.0 : 1	10 watts	1x RP-SMA/m, pigtail cable	245 (h)	-40° C to +70° C	
		5.150 GHz - 5.875 GHz	6.0 dBi		360	20						

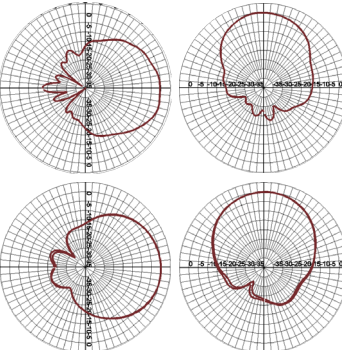


INDOOR/OUTDOOR (RP-SMA)

MODEL	TYPE	BAND(S)	TYPICAL GAIN	POLARIZATION & ELEMENT TYPE	BANDWIDTH (DEGREES)		VSWR	MAX INPUT POWER	CONNECTOR(S)	DIMENSIONS (MM)	OPERATING TEMPERATURE	ANTENNA PATTERNS
					H-PLANE	E-PLANE						
AP-ANT-20 	Dual-band omni, direct mount	2.400 GHz - 2.500 GHz	2.0 dBi	Linear, vertical. Omnidirectional patterns at all frequencies.	360	80	< 2.0 : 1	2 watts	1xRP-SMA with articulating mount	79 x 35.3 x 10 with articulating mount at 90 degree angle 102 x 14.8 x 10 fully extended	-10° C to +55° C (+14° F to +131° F)	
		4.900 GHz - 5.875 GHz	2.0 dBi									
AP-ANT-25A 	AP-ANT-25A is a dual polarized antenna with nominal 90° H x 90° V beamwidths. This antenna is well suited for 2.4-GHz and 5-GHz sector coverage for access.	2.4 GHz - 2.5 GHz	5 dBi min	Slant +/- 45°	100	90	2:1 max	20 watts	75 cm (30") RP-SMA pigtails x2	200 x 200 x 32	-45° C to +70° C	
		4.9 GHz - 6.0 GHz										
AP-ANT-25 	AP-ANT-25 is a dual-polarized antenna with nominal 90° H x 90° V beamwidths. This antenna is well suited for 2.4-GHz and 5-GHz sector coverage for Wi-Fi access.	2.4 GHz - 2.5 GHz	5 dBi min	Slant +/- 45°	100	90	2:1 max	20 watts	75 cm (30") RP-SMA pigtails x2	200 x 200 x 33	-45°C to +70°C	
		4.9 GHz - 6.0 GHz										

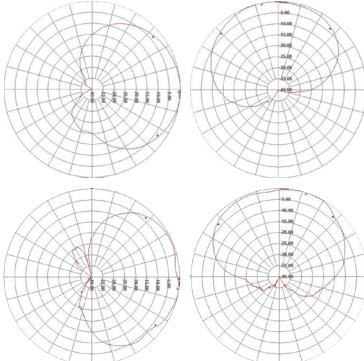
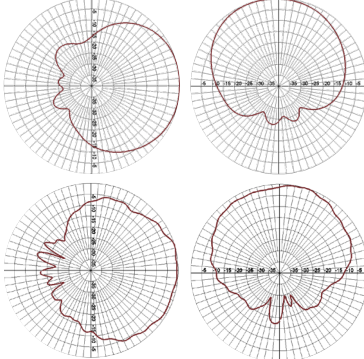
INDOOR/OUTDOOR (RP-SMA)

MODEL	TYPE	BAND(S)	TYPICAL GAIN	POLARIZATION & ELEMENT TYPE	BANDWIDTH (DEGREES)		VSWR	MAX INPUT POWER	CONNECTOR(S)	DIMENSIONS (MM)	OPERATING TEMPERATURE	ANTENNA PATTERNS
					H-PLANE	E-PLANE						
AP-ANT-28 	Dual-polarized antenna with nominal 60° H x 60° V beamwidths for 2.4-GHz and 5-GHz sector coverage	2.4 GHz - 2.5 GHz	7.5 dBi min	Slant +/- 45°	60	60	2:1 max	6 watts	75 cm (30") RP-SMA pigtail	197.5 x 197.5 x 34.5	-45° C to +65° C	
		4.9 GHz - 6.0 GHz										
AP-ANT-35A 	AP-ANT-35A is a multipolarized antenna with nominal 90° H x 90° V beamwidths. This antenna is well suited for 2.4-GHz and 5-GHz sector coverage for access.	2.4 GHz - 2.5 GHz	5 dBi min	Vertical and slant +/- 45°	100	90	2:1 max	20 watts	75 cm (30") RP-SMA pigtails x3	200 x 200 x 32	-45° C to +70° C	
		4.9 GHz - 6.0 GHz										
AP-ANT-35 	AP-ANT-35 is a multipolarized antenna with nominal 90° H x 90° V beamwidths. This antenna is well suited for 2.4-GHz and 5-GHz sector coverage for Wi-Fi access.	2.4 GHz - 2.5 GHz	5 dBi min	Slant +/- 45°	100	90	2:1 max	20 watts	75 cm (30") RP-SMA pigtails x3	200 x 200 x 33	-45°C to +70°C	
		4.9 GHz - 6.0 GHz										

OUTDOOR/INDOOR (N-TYPE)

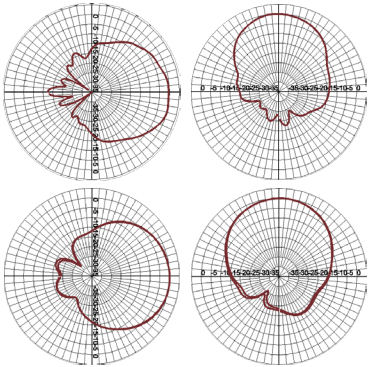


MODEL	TYPE	BAND(S)	TYPICAL GAIN	POLARIZATION & ELEMENT TYPE	BANDWIDTH (DEGREES)		VSWR	MAX INPUT POWER	CONNECTOR(S)	DIMENSIONS (MM)	OPERATING TEMPERATURE	ANTENNA PATTERNS
					H-PLANE	E-PLANE						
AP-ANT-38 	Multipolarized antenna with 60° H x 60° V beamwidths for 2.4-GHz and 5-GHz sector coverage	2.4 GHz - 2.5 GHz	7.5 dBi min	V, and Slant +/- 45°	60	60	2.1 max	6 watts	3x RP-SMA pigtail cable	197.5 x 197.5 x 34.5	-45° C to +65° C	
		4.9 GHz - 6.0 GHz										
AP-ANT-90 	Downtilt diversity omni	2.400 GHz - 2.500 GHz	3.0 dBi	Vertical, linear downtilt	360	57-61	< 2.0 : 1	2 watts	2x N-type/m, pigtail cable	157 x 93 x 23	-40° C to +70° C	
		4.900 GHz - 5.990 GHz	3.0 dBi		360	55-59						
AP-ANT-92 	120 Degree 3x3 MIMO sector	2.400 GHz - 2.500 GHz	6.0 dBi	Linear dual-slant +/-45 degrees	120	60	< 1.7 : 1	50 watts	3x N-type/m, pigtail cable	200 x 200 x 33	-40° C to +70° C	
		4.900 GHz - 5.875 GHz	5.0 dBi									

OUTDOOR/INDOOR (N-TYPE)


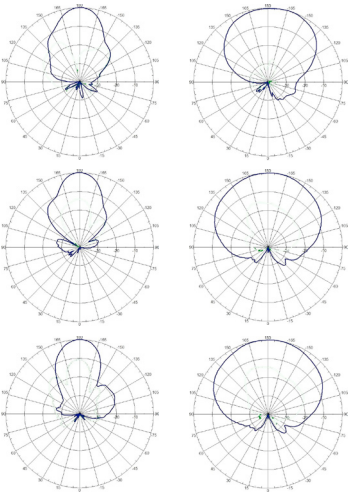
MODEL	TYPE	BAND(S)	TYPICAL GAIN	POLARIZATION & ELEMENT TYPE	BANDWIDTH (DEGREES)		VSWR	MAX INPUT POWER	CONNECTOR(S)	DIMENSIONS (MM)	OPERATING TEMPERATURE	ANTENNA PATTERNS
					H-PLANE	E-PLANE						
AP-ANT-93 	High gain 3x3 MIMO directional	5.150 GHz - 5.875 GHz	14.0 dBi	Linear dual-slant +/-45 degrees	20	20	< 1.7 : 1	50 watts	3x N-type/f, connectors	305 x 305 x 15	-55° C to +65° C	
ANT-3X3-D905 	ANT-3x3-D905 is a multi-polarized antenna with 90° horizontal x 90° vertical beamwidths. This antenna is well suited for 2.4-GHz and 5-GHz sector Wi-Fi coverage.	2.4 GHz - 2.5 GHz	5 dBi min	V and slant +/- 45°	100	90	2:1 max	20 watts	N-type female x3 (RF cables not included)	200 x 200 x 33 mm	-45°C to +70°C	
		4.9 GHz - 6.0 GHz										
ANT-3X3-D100 	ANT-3x3-D100 is a multipolarized antenna with 90° H x 90° V beamwidths. This antenna is well suited for 2.4-GHz and 5-GHz sector coverage for access.	2.4 GHz - 2.5 GHz	5 dBi min	Vertical and slant +/- 45°	100	90	2:1 max	20 watts	N-type female x3 (RF cables not included)	200 x 200 x 33	-45° C to +70° C	
		4.9 GHz - 6.0 GHz										

 Use N-type/m to N-type/m RF cable to connect antenna to AP (order separately)




OUTDOOR/INDOOR (N-TYPE)

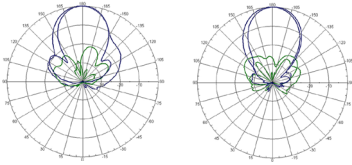
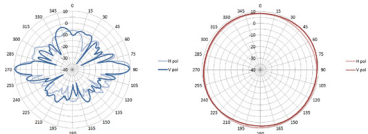
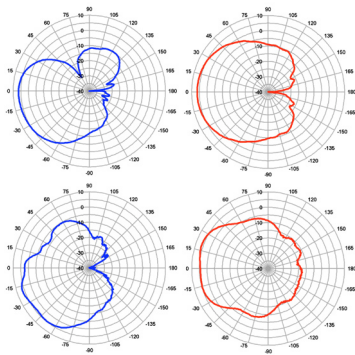
MODEL	TYPE	BAND(S)	TYPICAL GAIN	POLARIZATION & ELEMENT TYPE	BANDWIDTH (DEGREES)		VSWR	MAX INPUT POWER	CONNECTOR(S)	DIMENSIONS (MM)	OPERATING TEMPERATURE	ANTENNA PATTERNS
					H-PLANE	E-PLANE						
ANT-3X3-D608 	Multipolarized 3x3 antenna with 60° horizontal x 60° vertical beamwidths. This antenna is well suited for 2.4-GHz and 5-GHz Wi-Fi coverage.	2.4 GHz - 2.5 GHz	7.5 dBi min	V and slant +/- 45°	60	60	2:1 max	6 watts	N-type female x3 (RF cables not included)	197.5 x 197.5 x 34.5	-45°C to +65°C	
		4.9 GHz - 6.0 GHz										
ANT-3X3-2005 	Three omnidirectional antennas – two vertical and one horizontal – for use in 802.11ac and 802.11n MIMO mesh link and client access applications	2.4 GHz - 2.5 GHz	5 dBi max	Vpol antenna: linear, vertical Hpol antenna: linear, horizontal	360	Vpol: 30 Hpol: 25	Vpol antenna: 1.7:1 min Hpol antenna: 2.0:1 min	Vpol antenna: 50 watts Hpol antenna: 10 watts	N-type male (RF cables not included)	Vpol antenna: 309 x 32 x 32 Hpol antenna: 329 x 45 x 45	-40° C to +70° C	
ANT-3X3-5005 	Three omnidirectional antennas – two vertical and one horizontal – for use in 802.11ac and 802.11n MIMO mesh link and client access applications	4.9 GHz - 5.875 GHz	5 dBi max	Vpol antenna: linear, vertical Hpol antenna: linear, horizontal	360	Vpol: 29 Hpol: 33	2.0:1 min	10 watts	N-type male (RF cables not included)	200 x 25 x 25	-40° C to +70° C	

OUTDOOR/INDOOR (N-TYPE)


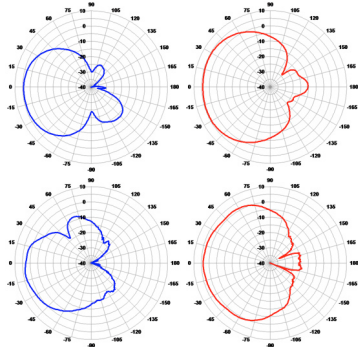
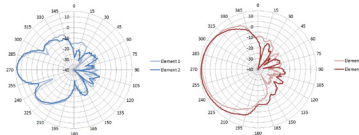
MODEL	TYPE	BAND(S)	TYPICAL GAIN	POLARIZATION & ELEMENT TYPE	BANDWIDTH (DEGREES)		VSWR	MAX INPUT POWER	CONNECTOR(S)	DIMENSIONS (MM)	OPERATING TEMPERATURE	ANTENNA PATTERNS
					H-PLANE	E-PLANE						
ANT-3X3-5010 	Three omnidirectional antennas – two vertical and one horizontal – for use in 802.11ac and 802.11n MIMO mesh link and client access applications	4.9 GHz - 5.875 GHz	10 dBi max	Vpol antenna: linear, vertical Hpol antenna: linear, horizontal	360	Vpol: 8 Hpol: 9.5	2.0:1 min	10 watts	N-type male (Note: RF cables not included)	Vpol antenna: 490 x 25 x 25 Hpol antenna: 451 x 25 x 25	-40° C to +70° C	
ANT-3X3-5712 	Multipolarized antenna with 70° horizontal and 25° vertical beamwidths	4.900 GHz - 6.000 GHz	11.5 dBi min	Pair: linear vertical and linear horizontal	70	Vpol: 25 Hpol: 25 Slant: 25	<2:1	6 watts	N-type female x 3 (RF cables not included)	190 x 190 x 30	-45° C to +65° C	

OUTDOOR/INDOOR (N-TYPE)

MODEL	TYPE	BAND(S)	TYPICAL GAIN	POLARIZATION & ELEMENT TYPE	BANDWIDTH (DEGREES)		VSWR	MAX INPUT POWER	CONNECTOR(S)	DIMENSIONS (MM)	OPERATING TEMPERATURE	ANTENNA PATTERNS
					H-PLANE	E-PLANE						
ANT-2X2-2005 	Direct mount omni, 2x2 MIMO pair	2.400 GHz - 2.500 GHz	5.0 dBi	Pair: linear vertical and linear horizontal	360	Vpol: 30 Hpol: 25	Vpol: <1.7 Hpol: <2.0	Vpol: 50 watts Hpol: 10 watts	2x N-type/m, direct mount	Vpol: 309 x 32 x 32 Hpol: 329 x 45 x 45	-30° C to +70° C	
ANT-2X2-2314 	Directional	2.400 GHz - 2.500 GHz	14.0 dBi	Dual: linear vertical and linear horizontal	30	30	<2.0:1	6 watts	2x N-type/f	260 x 261 x 30	-45° C to + 65° C	
ANT-2X2-5005 	Direct mount omni, 2x2 MIMO pair	5.150 GHz - 5.875 GHz	5.0 dBi	Pair: linear vertical and linear horizontal	360	Vpol: 29 Hpol: 33	< 2.0 : 1	10 watts	2x N-type/m, direct moun	200 x 25 x 25	-30° C to +70° C	

OUTDOOR/INDOOR (N-TYPE)												
MODEL	TYPE	BAND(S)	TYPICAL GAIN	POLARIZATION & ELEMENT TYPE	BANDWIDTH (DEGREES)		VSWR	MAX INPUT POWER	CONNECTOR(S)	DIMENSIONS (MM)	OPERATING TEMPERATURE	ANTENNA PATTERNS
					H-PLANE	E-PLANE						
ANT-2X2-5314 	Directional	4.900 GHz - 5.875 GHz	14.0 dBi	Dual: linear vertical and linear horizontal	30	30	<2.0:1	6 watts	2x N-type/f	190 x 190 x 30	-45° C to +65° C	
ANT-2X2-5010 	Direct mount omni, 2x2 MIMO pair	5.150 GHz - 5.875 GHz	10.0 dBi	Pair: linear vertical and linear horizontal	360	Vpol: 8 Hpol: 9.5	< 2.0 : 1	10 watts	2x N-type/m, direct mount	Vpol: 490 x 25 x 25 Hpol: 451 x 25 x 25	-30° C to +70° C	
ANT-2X2-D607 	60 Degree 2x2 MIMO sector	2.400 GHz - 2.500 GHz	7.0 dBi	Linear dual-slant +/-45 degrees	60	50	< 1.8 : 1	20 watts	2x N-type/m, pigtail cable	200 x 200 x 33	-40° C to +70° C	
		5.150 GHz - 5.875 GHz	7.0 dBi									

Use N-type/m to N-type/m RF cable to connect antenna to AP (order separately)

OUTDOOR/INDOOR (N-TYPE)												
MODEL	TYPE	BAND(S)	TYPICAL GAIN	POLARIZATION & ELEMENT TYPE	BANDWIDTH (DEGREES)		VSWR	MAX INPUT POWER	CONNECTOR(S)	DIMENSIONS (MM)	OPERATING TEMPERATURE	ANTENNA PATTERNS
					H-PLANE	E-PLANE						
ANT-2X2-D805 	120 Degree 2x2 MIMO sector	2.400 GHz - 2.500 GHz	5.0 dBi	Linear dual-slant +/-45 degrees	120	70	< 1.8 : 1	20 watts	2x N-type/m, pigtail cable	200 x 200 x 33	-40° C to +70° C	
		5.150 GHz - 5.875 GHz	5.0 dBi									
ANT-2X2-2714 	High gain 2x2 MIMO directional	2.400 GHz - 2.483 GHz	14.0 dBi	Linear dual-slant +/-45 degrees	70	23	< 1.5 : 1	20 watts	2x N-type/f, connectors	306 x 306 x 25	-45° C to +70° C	

Use N-type/m to N-type/m RF cable to connect antenna to AP (order separately)



1344 CROSSMAN AVE | SUNNYVALE, CA 94089
1.866.55.ARUBA | T: 1.408.227.4500 | FAX: 1.408.227.4550 | INFO@ARUBANETWORKS.COM

www.arubanetworks.com

©2015 Aruba Networks, Inc. Aruba Networks®, Aruba The Mobile Edge Company® (stylized), Aruba Mobilty Management System®, People Move. Networks Must Follow.®, Mobile Edge Architecture®, RFProtect®, Green Island®, ETIPS®, ClientMatch®, Bluescanner™ and The All Wireless Workspace Is Open For Business™ are all Marks of Aruba Networks, Inc. in the United States and certain other countries. The preceding list may not necessarily be complete and the absence of any mark from this list does not mean that it is not an Aruba Networks, Inc. mark. All rights reserved. Aruba Networks, Inc. reserves the right to change, modify, transfer, or otherwise revise this publication and the product specifications without notice. While Aruba Networks, Inc. uses commercially reasonable efforts to ensure the accuracy of the specifications contained in this document, Aruba Networks, Inc. will assume no responsibility for any errors or omissions. Matrix_Antennas_011915